



#3

1807.1984

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:)
: Examiner: Unassigned
DANIEL JOHN LLOYD-JONES, ET AL.)
: Group Art Unit: 2173
Application No.: 09/769,468)
:
Filed: January 26, 2001)
:
For: VIDEO BROWSER DATA) May 7, 2001
: MAGNIFIER)

Commissioner for Patents
Washington, D.C. 20231

CLAIM TO PRIORITY

Sir:

Applicants hereby claim priority under the
International Convention and all rights to which they are
entitled under 35 U.S.C. § 119 based upon the following
Australian Priority Application:

BEST AVAILABLE COPY


PQ 5351 Australia January 31, 2000.

A certified copy of the priority document is
enclosed.

Applicants' undersigned attorney may be reached in
our Washington, D.C. office by telephone at (202) 530-1010.

All correspondence should continue to be directed to our
address given below.

Respectfully submitted,



Attorney for Applicants
Shawn W. Fraser
Registration No. 45,886

FITZPATRICK, CELLA, HARPER & SCINTO
30 Rockefeller Plaza
New York, New York 10112-3801
Facsimile: (212) 218-2200

SWF:eyw



Patent Office
Canberra

I, LEANNE MYNOTT, ACTING MANAGER EXAMINATION SUPPORT & SALES, hereby certify that annexed is a true copy of the Provisional specification in connection with Application No. PQ 5351 for a patent by CANON KABUSHIKI KAISHA filed on 31 January 2000.

I further certify that pursuant to the provisions of Section 38(1) of the Patents Act 1990 a complete specification was filed on 29 January 2001 and it is an associated application to Provisional Application No. PQ 5351 and has been allocated No. 16705/01.

WITNESS my hand this
Thirteenth day of February 2001

LEANNE MYNOTT
ACTING MANAGER EXAMINATION
SUPPORT & SALES

App/n. No.: 09/769,428
Filed: January 26, 2001
Inventor: Daniel John Lloyd-Jones, et al.
Title: Video Browser Data Magnifier

BEST AVAILABLE COPY

CERTIFIED COPY OF
PRIORITY DOCUMENT



ORIGINAL

AUSTRALIA

Patents Act 1990

PROVISIONAL SPECIFICATION FOR THE INVENTION ENTITLED:

Video Browser Data Magnifier

Name and Address of Applicant:

Canon Kabushiki Kaisha, incorporated in Japan, of 30-2, Shimomaruko 3-chome,
Ohta-ku, Tokyo, 146, Japan

Name of Inventor: Daniel John Lloyd-Jones and Julie Rae Kowald

This invention is best described in the following statement:

VIDEO BROWSER DATA MAGNIFIER

Technical Field of the Invention

The present invention relates generally to the display of video data, and to data
5 browsers in particular. The invention also relates to a computer program product
including a computer readable medium having recorded thereon a computer program for
browsing video data in accordance with the disclosed inventive concept.

Background Art

10 The sheer volume of data associated with video sources presents a challenge to
it's utility. If desired material cannot easily and simply be searched for, and/or if data of
interest cannot be identified by browsing through material, then the accumulated video
data becomes much less useful than it might be.

A key problem with present browsers is complexity, browsers typically
15 involving numerous menus, options, icons and complex graphical user interfaces. This is
a direct consequence of the amount of information that is associated with video data. The
aforementioned complexity limits the practical utility of such browsers.

Disclosure of the Invention

20 It is an object of the present invention to substantially overcome, or at least
ameliorate, one or more disadvantages of existing arrangements.

According to a first aspect of the invention, there is provided a method of
conceptually magnifying video browser data, said data being organised hierarchically in
one or more levels, the method comprising steps of:

selecting a parent level, said parent level selection making visible a first key frame associated with said parent level;

choosing one of a parent-only and a parent-children magnification mode; and

initiating conceptual magnification; said magnification displaying, in the parent-only mode, the first key frame associated with said parent level and other frames which are also associated with said parent level; and said magnification displaying, in the parent-children mode, the first key frame associated with said parent level and second key frames associated with an associated children level.

According to a second aspect of the invention, there is provided an apparatus for conceptually magnifying video browser data, said data being organised hierarchically in one or more levels, the apparatus comprising:

parent level selection means for selecting a parent level, said parent level selection making visible a first key frame associated with said parent level;

magnification mode selection means for choosing one of a parent-only and a parent-children magnification mode;

conceptual magnification initiating means for initiating conceptual magnification; and

display means, for displaying, in the parent-only mode, the first key frame associated with said parent level and other frames which are also associated with said parent level; and for displaying, in the parent-children mode, the first key frame associated with said parent level and second key frames associated with an associated children level.

According to another aspect of the invention there is provided a computer program product including a computer readable medium having recorded thereon a computer program for implementing the method described above.

The present invention ameliorates the problem of complicated interfaces which overload the user with information by providing a simplified interface which permits the user to browse the video, providing only the information necessary to search and identify particular portions of the video. Information related to the video is abstracted and initially
5 hidden from the user, allowing the user to "drill down" to this data at will.

Brief Description of the Drawings

A number of preferred embodiments of the present invention will now be described with reference to the drawings, in which:

10 Fig. 1 depicts an arrangement for organisation of video data;

Fig. 2 illustrates a hierarchical organisation of video data in accordance with a preferred embodiment of the invention;

Fig. 3 shows a parent/child relationship in relation to Fig. 2;

Fig. 4 depicts a browser user interface associated with the preferred embodiment;

15 Fig. 5 is a schematic block diagram of a general purpose computer upon which the preferred embodiment of the present invention can be practiced;

Fig. 6 shows another embodiment based upon a hand-held wireless configuration; and

Fig. 7 shows a process flow diagram for the preferred embodiment.

20

Detailed Description including Best Mode

Where reference is made in any one or more of the accompanying drawings to steps and/or features, which have the same reference numerals, those steps and/or features have for the purposes of this description the same function(s) or operation(s), unless the
25 contrary intention appears.

The proud owner of a digital video camera soon accumulates a large number of video tapes, and the issue arises of how to store and access the video data. As with any data storage and retrieval situation, the manner in which data is stored and the extent to which it is accessible determines its utility, and the extent to which it can be used and enjoyed.

Fig. 1 depicts how video information stored in video cassettes 102 are physically stored on a set of shelves 100. Each shelf 104, 106, ..., 108 is assigned to a different area of interest. Accordingly, the first shelf 104 is in the present case allocated to "holidays", the second shelf 106 is dedicated to "sports", ..., and the bottom shelf 108 is relegated to "miscellaneous" and other unclassifiable type of material.

Having considered the entire collection of individual video cassettes, each individual cassette is now considered, and in order to set the scene for so doing, the cassette 102 is depicted, as depicted by an arrow 110, in an inset 112, in a somewhat larger representation 114. The individual video cassette 114, or rather the contents thereof, can be depicted as indicated by an arrow 116 as a series of scenes 120, ..., 122, these scenes being shown in an inset 118. The terms "shelf" and "section" are used interchangeably throughout the description, and have the same meaning unless dictated otherwise by context. Similarly, the terms "tape" and "cassette" are similarly used interchangeably.

Each scene, e.g. 120, is composed of a sequence of individual video clips as depicted by arrows 130, 126, and 132. Each clip, e.g. 126, is similarly composed of a sequence of individual video frames 128, ..., 134. Accordingly, the video information is arranged in a hierarchical structure, commencing at the highest level with the entire collection housed in the set of shelves 100, the shelves comprising a series of individual shelves or sections 104, 106, ..., 108, each section 104 comprising individual cassettes or

tapes 102, 114, each tape 114 comprising a sequence or set of scenes 120, 122, each scene consisting of a sequence of clips 126, and finally each clip 126 comprising a sequence of individual frames 128.

Fig. 2 shows an abstraction of the physical picture presented in Fig. 1.

5 Accordingly, at the highest level, a number of sections 200, 202, 204 represent the shelves 104 described in relation to Fig. 1. Each section 204 comprises, as depicted by a set of arrows 206, of a number of individual tapes 208, 210, and 212. Furthermore, each individual tape 212, comprises, as indicated by a set of arrows 214, a number of scenes 216, 218, and 220. Associated with each scene 220, as depicted by a dashed arrow 238, is

10 a set of key frames 240, 242, and 244, of which one particular key frame 240 is a “principal key frame”, this being indicated by the asterisk on the right hand side of the reference numeral. Each scene 220, comprises, as depicted by a set of arrows 222, a number of clips 224, 226, and 228. Each clip 228 is associated with a set of key frames 246, one of which key frames is again a principal key frame. Each clip 228, comprises, as

15 indicated by a set of arrows 230, a number of objects 232, 234, and 236. The term “object” relates to a specific feature in a set of video frames, the feature being of particular interest to the user. As an example, a video scene taken at an airport when meeting a family member returning from holiday is considered. In particular, a video clip is considered in which the arriving aircraft enters the video camera’s field of view,

20 remains there while it travels from left to right across the field of view, and then exits the field of view. This clip can be characterized in terms of an object (i.e., the aeroplane in this instance) during the time the plane crosses the field of view. Associated with the particular object 236 is a set of key frames 248, one of which is a principal key frame.

Fig. 3 provides a “parent/children” generic representation of two levels in the

25 data organisation hierarchy. Items 300, 302, and 304 are shown to be on the same

hierarchical level. Associated with an item 304, as indicated by a dashed arrow 338, is a set of frames 340, 342 and 346, the frame 340 being a key frame as indicated by the asterisk. The parent item 304 is associated, as indicated by a set of arrows 306, with a child "hierarchical level", comprising items 308, 310 and 312. Each of the
5 aforementioned items is associated, as indicated by dashed arrows 330, 314 and 322, with a set of representative frames. For example, item 312 is associated with the set of frames 324, 326 and 328, where frame 324 is a key frame as indicated by the asterisk. The term "key frame" is utilised throughout the description to indicate a frame which is particularly representative of the item with which it is associated.

10 Reviewing the description presented in relation to Figs. 1 through 3, it is noted that (i) video data is organised in a hierarchical structure with a number of levels, (ii) each level comprises a number of items, where each item is associated with one or more key frames, one of which is a principal key frame, and (iii) each key frame associated with a particular item on a hierarchical level is representative of that item, noting that the
15 principal key frame is "most" representative, this being judged according to some criterion.

Fig. 4 shows a graphical user interface (GUI) associated with a preferred embodiment of the invention. The embodiment "*magnifies*" the tree structure on a number of different levels:

20 1. Physically it magnifies the actual keyframe images that appear on the right hand side scrolling device tree structure. This allows user to see the content more clearly as the keyframes in the tree structure are quite small.

 2. Magnifies hidden content - by showing the collapsed content of a scene (ie. show the user the keyframes of the clips that are hidden in a scene that is not
25 expanded.)

3. Magnifies the data hidden in video footage by showing the multiple keyframes of a clip or object.

The GUI is being displayed on a personal computer (PC) 500 (see Fig. 5). When a term “selection” or “selected” is used hereinafter, it is to be understood that this is performed using one or more of a mouse 503 (see Fig. 5), selected key strokes on a keyboard 502, positioning of a GUI pointer 422 and positioning of a scrolling device 406. The GUI is presented in an attractive frame 400, and the hierarchical organisation of information is presented on the right-hand side of the frame. The tree structure has 5 visible levels (refer to Table below and Fig. 4)

10

Section	A video category assigned by the home user, for example Holidays in Fig. 4.
Tape	Video footage taken from a single tape. Appear as children of the Section. For example Cairns 98 in Fig. 4.
Scene	A sequence of clips taken within a short time period. Appear as children of a Tape. The right-most vertically aligned channel of keyframes in Fig. 4.
Clip	A sequence of consecutive video frames between a record start and record stop marker on a DV tape. Clips are in the middle vertically aligned channel and appear as children of a scene.
Object	A sequence of consecutive video frames that track on objects movement. The frames are from the parent's video footage, thus objects are a subset of their parental clip. Objects are in the left-most vertically aligned channel and appear as children of a clip. The only object in Fig. 4 appears in the data magnifier. (a frame of 3 scuba divers)

The hierarchy can be expanded and collapsed by selecting the expander boxes 430 on the right of a tree item. A '+' in an expander box signifies that there is lower level

hierarchy content hidden (collapsed/not expanded). Whereas, an empty box signifies that the current level is expanded and its immediate children are visible.

Clips and Objects relate to specific video entities, whereas the other levels can be considered as groupings of clips/objects that provide structure and temporal location, although these latter levels can also be played.

Accordingly, at the highest hierarchical level, the selected section is that of “holidays” as depicted by the reference numeral 402. The selected child 404 associated with the section 402 is identified as “Cairns ‘98”, which represents a tape (e.g., 102 in Fig. 1) which has been classified in the holidays section. Within the tape 404, there are a number of scenes 406, ..., 408. The scene 406 displays a small square 430 with a “+” at its top right hand corner, this “+” indicating that “child” information is “hidden” within the scene 406 but is not displayed on the GUI. In contrast, the scene 408 shows an empty square 432 at its top right hand corner, this indicating that the child information contained within the scene 408 is displayed on the GUI as clips 410, ..., 412. In a similar fashion, the final clip 412 displays an empty box 434 at its top right hand corner, indicating that its child, i.e., the “object” residing within the clip, is displayed in the GUI as object 414 displayed in the GUI.

The particular representation of the hierarchical information ranging from the holiday section 402 down to the object 414 is a convenient arrangement which allows the user of the GUI to select a particular hierarchical level for “conceptual magnification”.

Selection of the desired hierarchical level can be performed with the pointer 422 (by using the mouse 503 etc. as already described). This pointer is arranged to “travel” on a circular track 424, in a manner dictated by the “invisible” radius 426, directed by the user appropriately “clicking and dragging” the pointer 422 using the mouse 503. When the user adjusts the radial orientation of the pointer 422, this adjustment, which changes

the radial orientation of the pointer 422 relative to the representations of the hierarchical data 402, 404, ..., points to, and thus selects the hierarchical data item (402, 404, ...) which most closely intersects the extended radial line 426 in the chosen orientation. In other words, the user is able to select a desired hierarchical level by radial adjustment of the pointer 422. Having selected the desired item, the embodiment automatically presents a frame representative of the selected hierarchical level, in conjunction with frames representative of the child hierarchical level. Such representative frames can be "key" frames, ie those frames designated by some process as being particularly representative. Alternatively, some other mechanism for determining representative frames can be used.

10 To continue therefore, if the user selects the scene 408, then a representative frame (eg a key frame) for the scene 408 will be displayed, in conjunction with representative frames (eg key frames) for each of the child clips 410, ... 412. The user is able to conceptually magnify, i.e., to "drill down", into the scene 408, and to view representative frames for the individual clips 410, ..., 412, which make up the scene 408. This conceptual

15 magnification is performed simply, and in an intuitive manner, making the browsing of video content practical and convenient, even when applied in relation to large amounts of video data.

The aforementioned representative frames are displayed in the display area 428. The manner of presentation is to display the frame associated with the hierarchical level, or "parent" scene 408, for, say six seconds, and then to display the representative frames

20 associated with the clips 410, ..., 412 for two seconds each. The frames are looped (i.e., animated) in a "through and left" trajectory on the screen 428, and a transition, for example a cross fade, is used between frames. When the display loop returns to the first (i.e., primary) key frame, the sequence is started again. The reason for leaving the

25 primary key frame on the screen for six second and the others for only two seconds, is to

maintain a contextual stability, so that the user does not lose the association between the hierarchical data structure displayed on the GUI, and the content in the magnifier screen 428. By leaving the primary key frame on for a longer duration than the other frames, the user can see that it matches back to the data structure on the GUI.

5 Noting that the hierarchical data structure can be longer than the size of the GUI frame 400, a scrolling device 420 is provided. By “dragging” the scrolling device 420 up, or down using the mouse 503, the hierarchical data structure items (402, 404, ...) are linearly translated in a corresponding direction (i.e., up, or down in accordance with the direction in which the scrolling device is dragged), moving the hierarchical data items
10 past the pointer 422. Accordingly, selection of a data item can be effected by adjustment of the pointer 422 and/or the scrolling device 420.

 In accordance with a second embodiment, instead of conceptually magnifying a representative frame of the parent hierarchical level, in conjunction with representative frames of all the associated child levels, it is possible to view representative frames from
15 all items on the same hierarchical level (e.g. 300, ..., 304 in Fig. 3). This option can be selected at any level by the user. In addition, upon reaching the “bottom” of the hierarchical data structure, since the bottom level has no children, representative frames from all items on the same hierarchical level are automatically conceptually magnified, ie viewed.

20 The method of conceptually magnifying video browser data can be practiced using a conventional general-purpose computer system 500, such as that shown in Fig. 5 wherein the processes of Figs. 6 may be implemented as software, such as an application program executing within the computer system 500. In particular, the steps of the method of conceptually magnifying video browser data are effected by instructions in the
25 software that are carried out by the computer. The software may be divided into two

separate parts, one part for carrying out the browsing magnification methods, and another part to manage the user interface between the latter and the user. The software may be stored in a computer readable medium, including the storage devices described below, for example. The software is loaded into the computer from the computer readable medium, and then executed by the computer. A computer readable medium having such software or computer program recorded on it is a computer program product. The use of the computer program product in the computer preferably effects an advantageous apparatus for conceptually magnifying video browser data in accordance with the embodiments of the invention.

The computer system 500 comprises a computer module 501, input devices such as a keyboard 502 and mouse 503, output devices including a printer 515 and a display device 514. The display device 514 can be provided with an associated touch screen 522, which provides an additional user interface. The GUI described in relation to Fig. 4 can be displayed on the display 514, and associated control functions can be activated using the touch screen 522. A Modulator-Demodulator (Modem) transceiver device 516 is used by the computer module 501 for communicating to and from a communications network 520, for example connectable via a telephone line 521 or other functional medium. The modem 516 can be used to obtain access to the Internet, and other network systems, such as a Local Area Network (LAN) or a Wide Area Network (WAN).

The computer module 501 typically includes at least one processor unit 505, a memory unit 506, for example formed from semiconductor random access memory (RAM) and read only memory (ROM), input/output (I/O) interfaces including a video interface 507, and an I/O interface 513 for the keyboard 502 and mouse 503 and optionally a joystick (not illustrated), and an interface 508 for the modem 516. A storage device 509 is provided and typically includes a hard disk drive 510 and a floppy disk

drive 511. A magnetic tape drive (not illustrated) may also be used. A CD-ROM drive 512 is typically provided as a non-volatile source of data. The components 505 to 513 of the computer module 501, typically communicate via an interconnected bus 504 and in a manner which results in a conventional mode of operation of the computer system 500 known to those in the relevant art. Examples of computers on which the embodiments can be practised include IBM-PC's and compatibles, Sun Sparcstations or alike computer systems evolved therefrom.

Typically, the application program of the preferred embodiment is resident on the hard disk drive 510 and read and controlled in its execution by the processor 505. Intermediate storage of the program and any data fetched from the network 520 may be accomplished using the semiconductor memory 506, possibly in concert with the hard disk drive 510. In some instances, the application program may be supplied to the user encoded on a CD-ROM or floppy disk and read via the corresponding drive 512 or 511, or alternatively may be read by the user from the network 520 via the modem device 516. Still further, the software can also be loaded into the computer system 500 from other computer readable medium including magnetic tape, a ROM or integrated circuit, a magneto-optical disk, a radio or infra-red transmission channel between the computer module 501 and another device, a computer readable card such as a PCMCIA card, and the Internet and Intranets including e-mail transmissions and information recorded on websites and the like. The foregoing is merely exemplary of relevant computer readable mediums. Other computer readable mediums may be practiced without departing from the scope and spirit of the invention.

The method of conceptually magnifying video browser data may alternatively be implemented in dedicated hardware such as one or more integrated circuits performing the functions or sub functions of browser conceptual magnification. Such dedicated

hardware may include graphic processors, digital signal processors, or one or more microprocessors and associated memories.

Turning to Fig. 6, an alternate embodiment is shown, comprising a portable hand-held device 608 which communicates using wireless transmission 610. The hand-held device 608 physically incorporates display and control functionality equivalent to that described in relation to the GUI in Fig. 4. Communication is established between the hand-held device 608 and a set top box 604, the latter being associated with a cable TV 606, where the set top box is connected to a network 600. Video image data on a remote server 612 which is connected to the network 600 can accordingly be accessed and browsed using the hand-held device 608.

Fig. 7 shows a process flow diagram for the contextual magnification process 616 of the preferred embodiments. In a first process 600, the hierarchical data is organised in a hierarchical structure. This step is typically performed "off-line", and while it is described as part of the process 616, this is for ease of understanding only. Thereafter, the user selects a hierarchical level for conceptual magnification in a process 602. Following thereon, in a decision process 604, a selection is made as to whether to view child frames in association with a parent frames, or alternatively, frames only from the parent level. In the former instance, the overall process is directed to a sub-process 606 where a representative frame for the parent is identified, this being a principle key frame, or a frame selected using another criterion. Thereafter, representative frames (eg key frames) are selected, or identified, for the associated child items, whereafter, the selected frames are presented in a cyclical fashion in the magnifier display 428 (see Fig. 4).

Alternatively, if the conceptual magnification is desired at the parent hierarchical level only, the overall process is directed to a sub-process 612. In 612, representative

frames from the parent level are selected, these being key frames, or frames selected using another criterion. Thereafter, the selected frames are presented in a sub-process 614.

5

Industrial Applicability

It is apparent from the above that the embodiments of the invention are applicable to the video data processing industries.

The foregoing describes only some embodiments of the present invention, and modifications and/or changes can be made thereto without departing from the scope and
10 spirit of the invention, the embodiments being illustrative and not restrictive.

In the context of this specification, the word “comprising” means “including principally but not necessarily solely” or “having” or “including” and not “consisting only of”. Variations of the word comprising, such as “comprise” and “comprises” have corresponding meanings.

Claims:

1. A method of conceptually magnifying video browser data, said data being organised hierarchically in one or more levels, the method comprising the steps of:

5 selecting a parent level, said parent level selection making visible a first key frame associated with said parent level;

choosing one of a parent-only and a parent-children magnification mode; and

initiating conceptual magnification; said magnification displaying, in the parent-only mode, the first key frame associated with said parent level and other frames which are also associated with said parent level; and said magnification displaying, in the
10 parent-children mode, the first key frame associated with said parent level and second key frames associated with an associated children level.

2. A method according to claim 1; whereby in the parent-only mode, said displaying comprises sub-steps of:

15 displaying the first key frame associated with said parent level for a first time interval; and

displaying the other frames which are also associated with said parent level for a second time interval; and whereby in the parent-children mode, said displaying comprises sub-steps of:

20 displaying the first key frame associated with said parent level for a third time interval; and

displaying said second key frames associated with said associated children level for a fourth time interval.

3. A method according to claim 1, whereby said first and second key frames, and said other frames, comprise one or more of text and image data.

4. An apparatus for conceptually magnifying video browser data, said data
5 being organised hierarchically in one or more levels, the apparatus comprising:

parent level selection means for selecting a parent level, said parent level selection making visible a first key frame associated with said parent level;

magnification mode selection means for choosing one of a parent-only and a parent-children magnification mode;

10 conceptual magnification initiating means for initiating conceptual magnification; and

display means, for displaying, in the parent-only mode, the first key frame associated with said parent level and other frames which are also associated with said parent level; and for displaying, in the parent-children mode, the first key frame
15 associated with said parent level and second key frames associated with an associated children level.

5. An apparatus according to claim 4, whereby representations of the hierarchically organised video data levels are spatially disposed in relation to selection
20 means, which selection means comprises a radially adjustable pointer whose radial orientation relative to the representations is indicative of the hierarchical level to be selected.

6. An apparatus according to claim 5, whereby an adjustable scrolling
25 means is adapted, in response to an adjustment, to linearly translate the representations of

the hierarchically organised video data levels in relation to the selection means, thereby effecting a change in the radial orientation of the selection means relative to the representations, said changed radial orientation relative to the representations being indicative of the hierarchical level to be selected.

5

DATED this Twenty-eighth Day of January, 2000

Canon Kabushiki Kaisha

Patent Attorneys for the Applicant

SPRUSON & FERGUSON

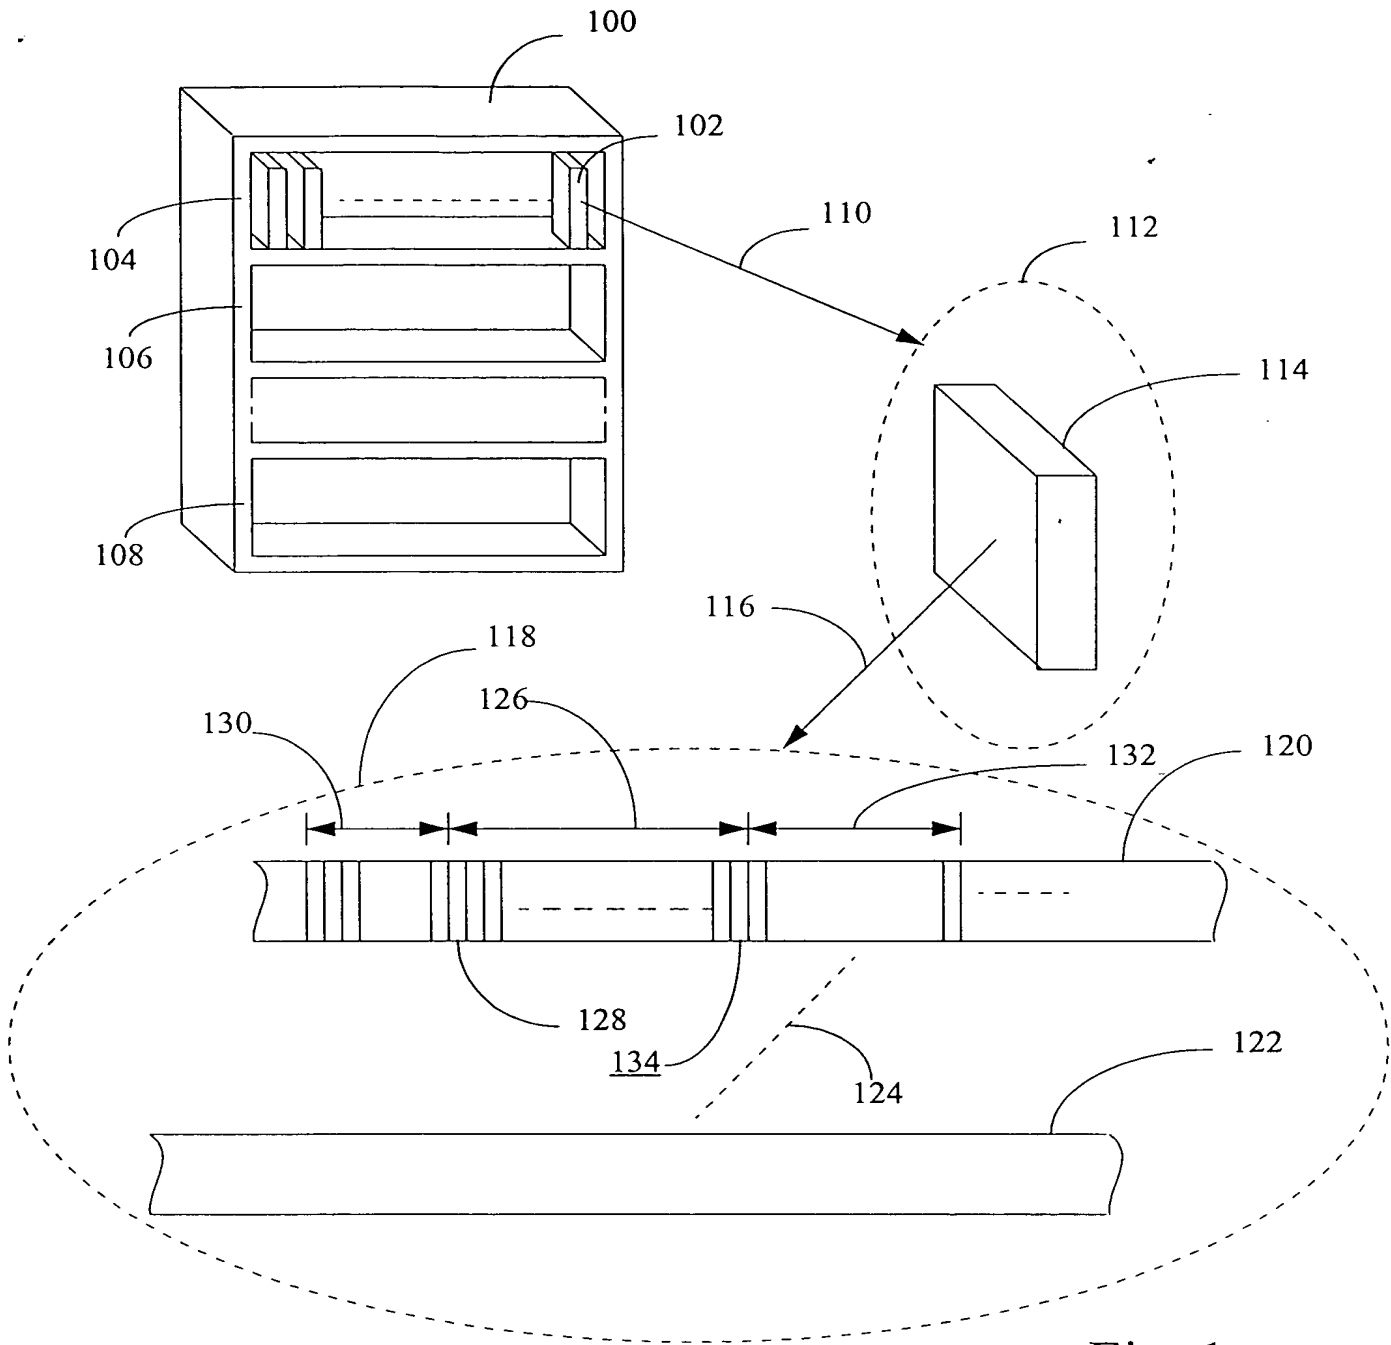


Fig. 1

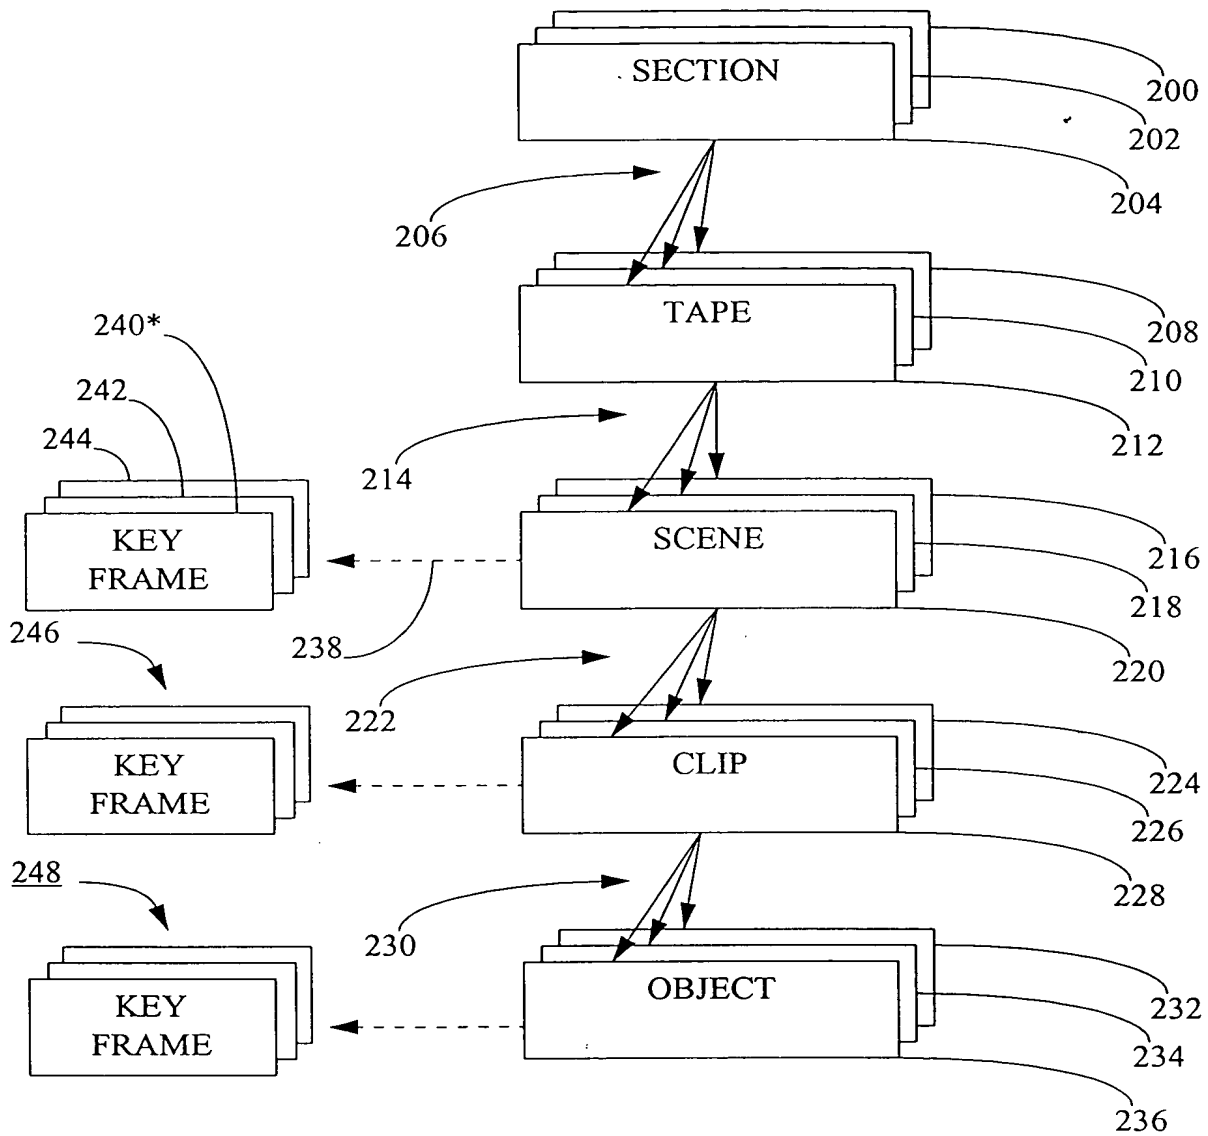


Fig. 2

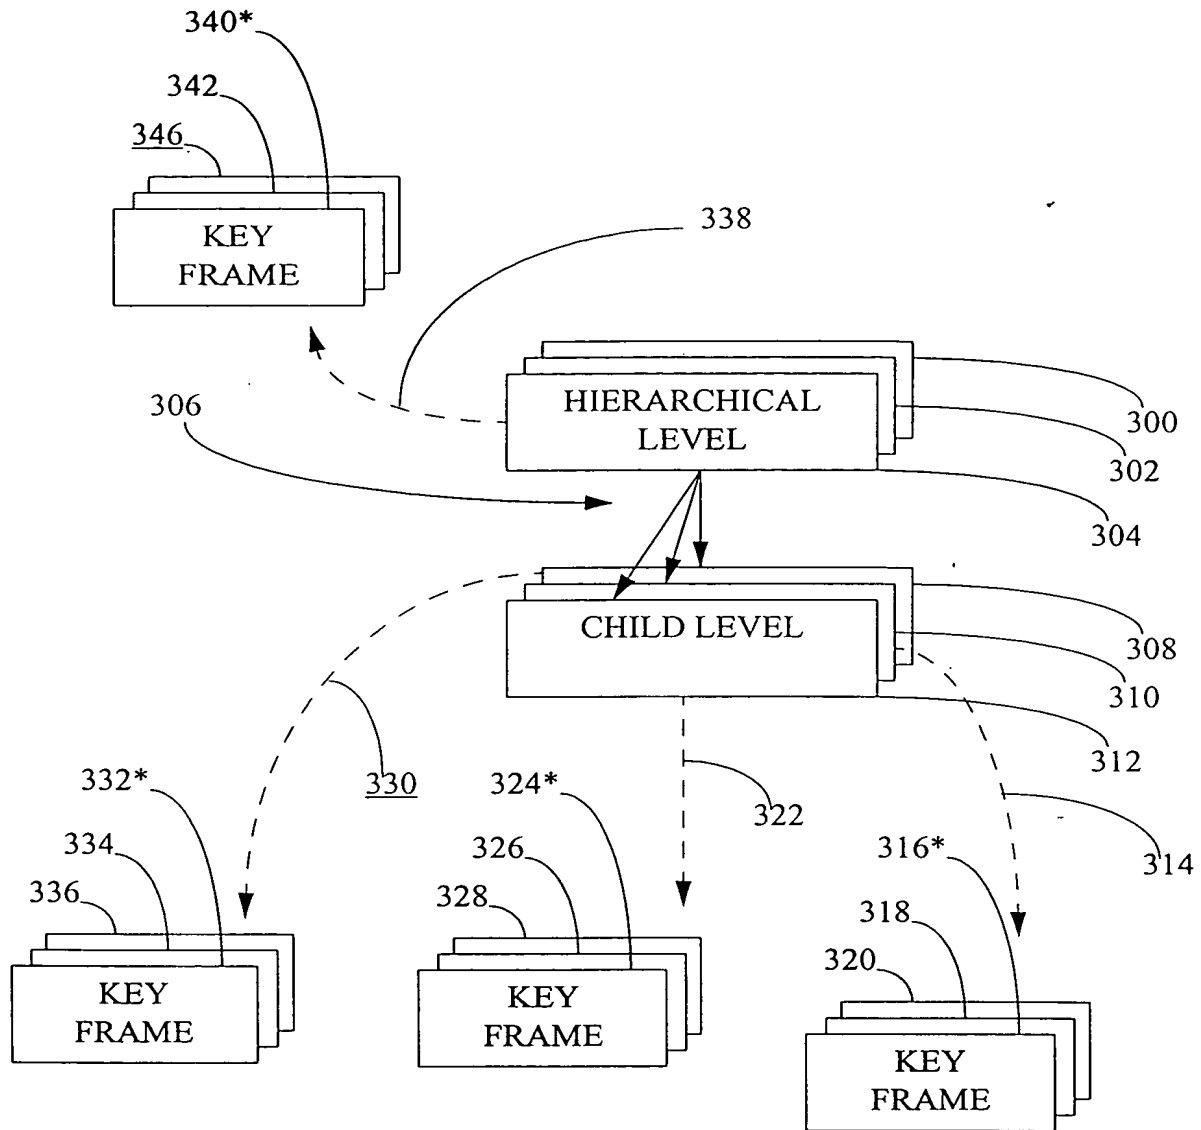


Fig. 3

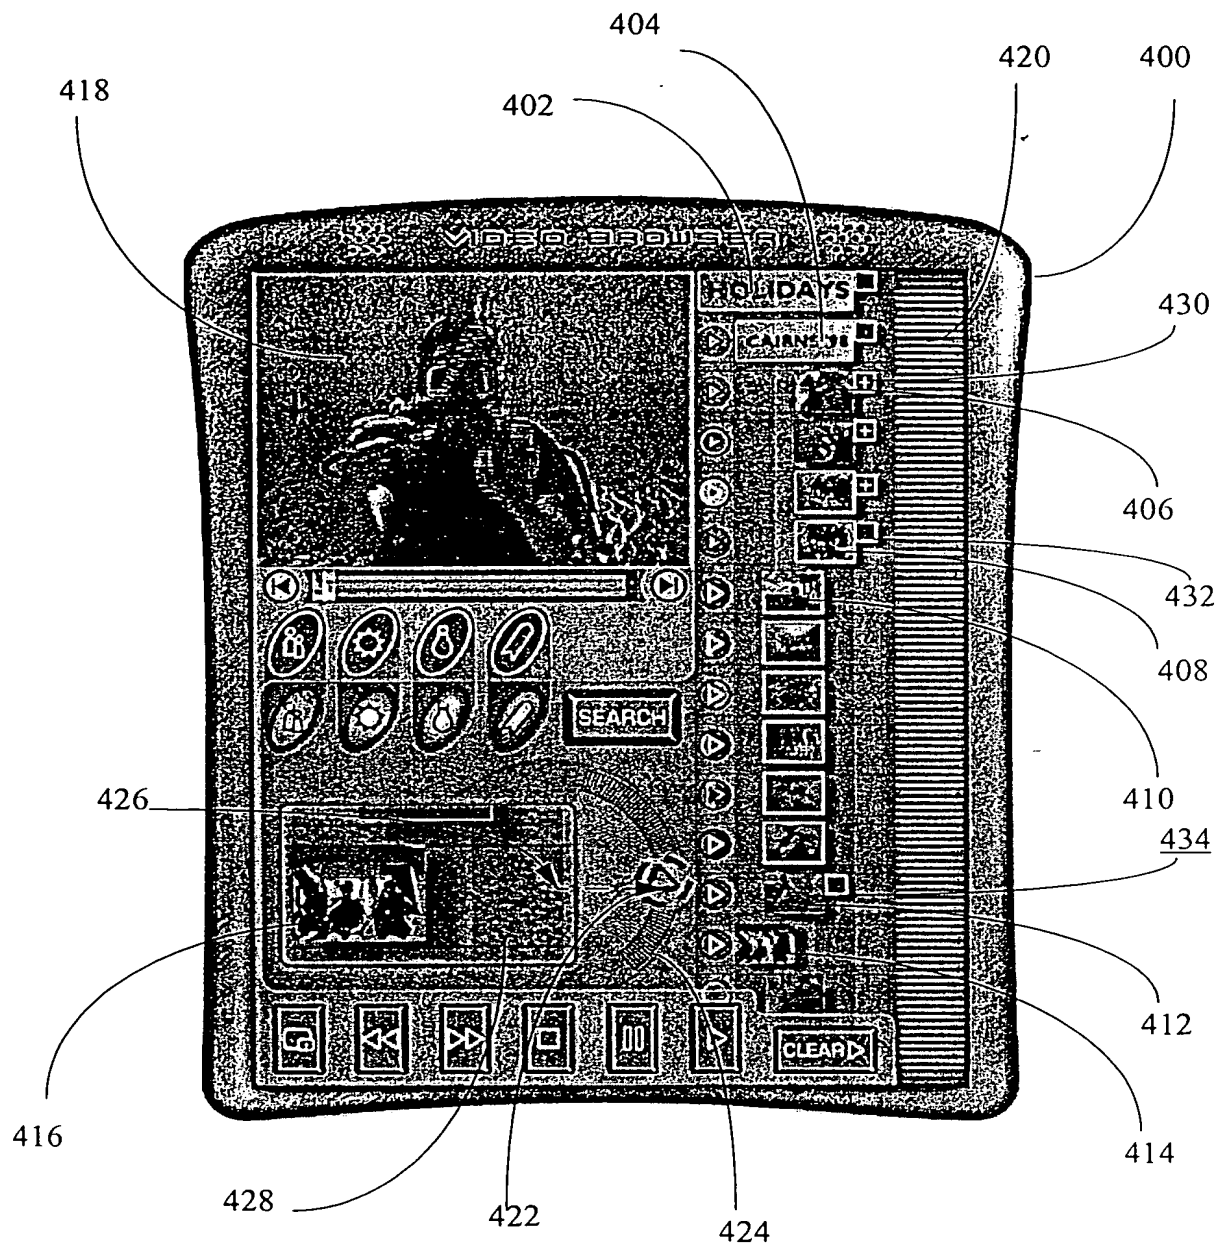


Fig. 4

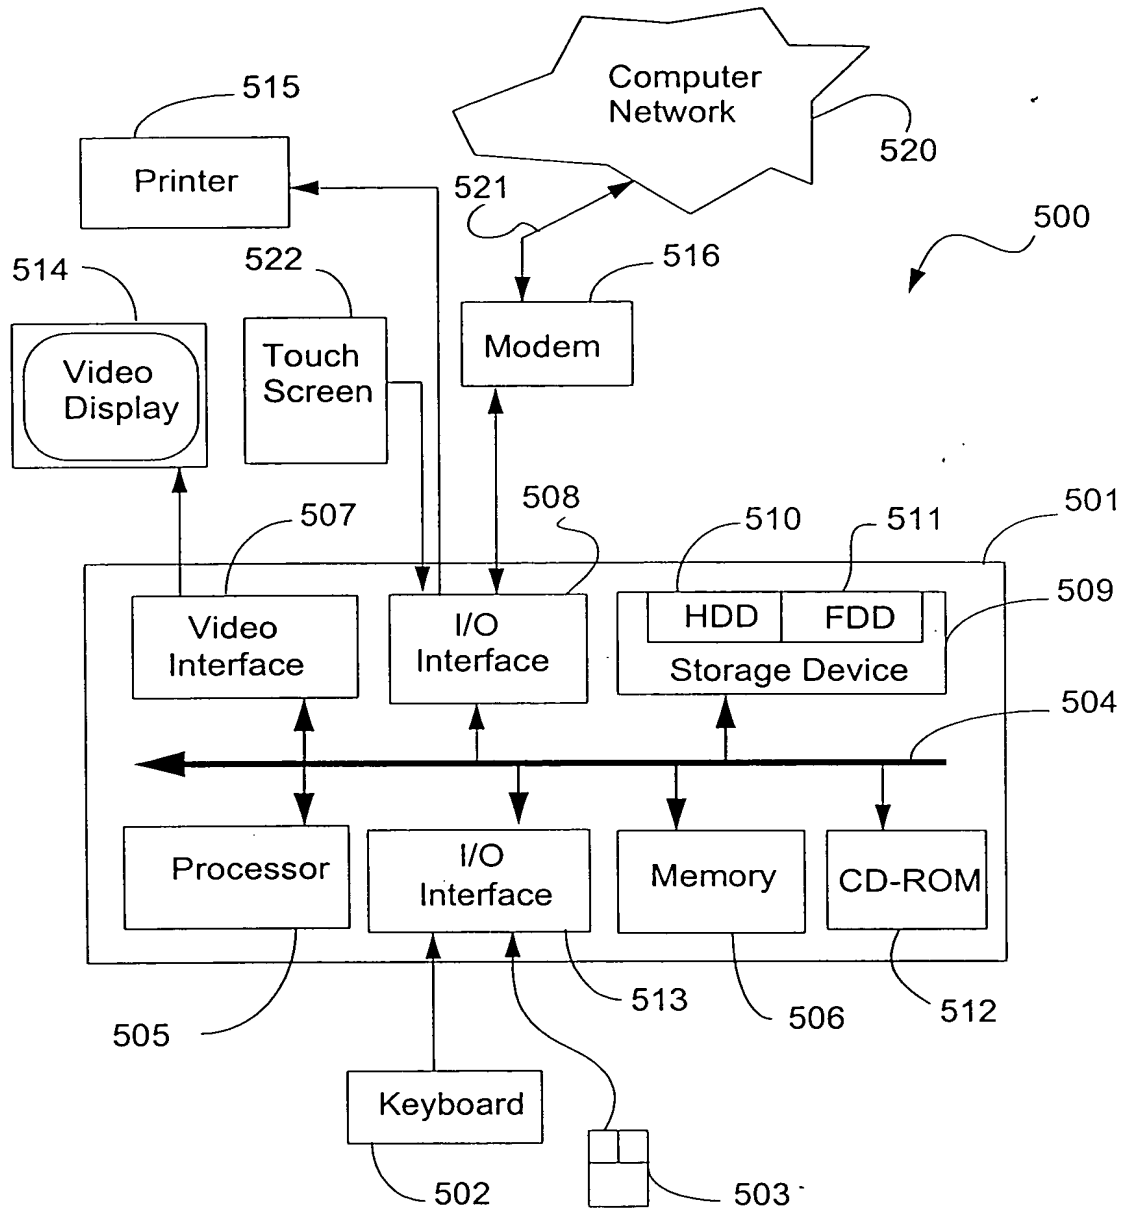


Fig. 5

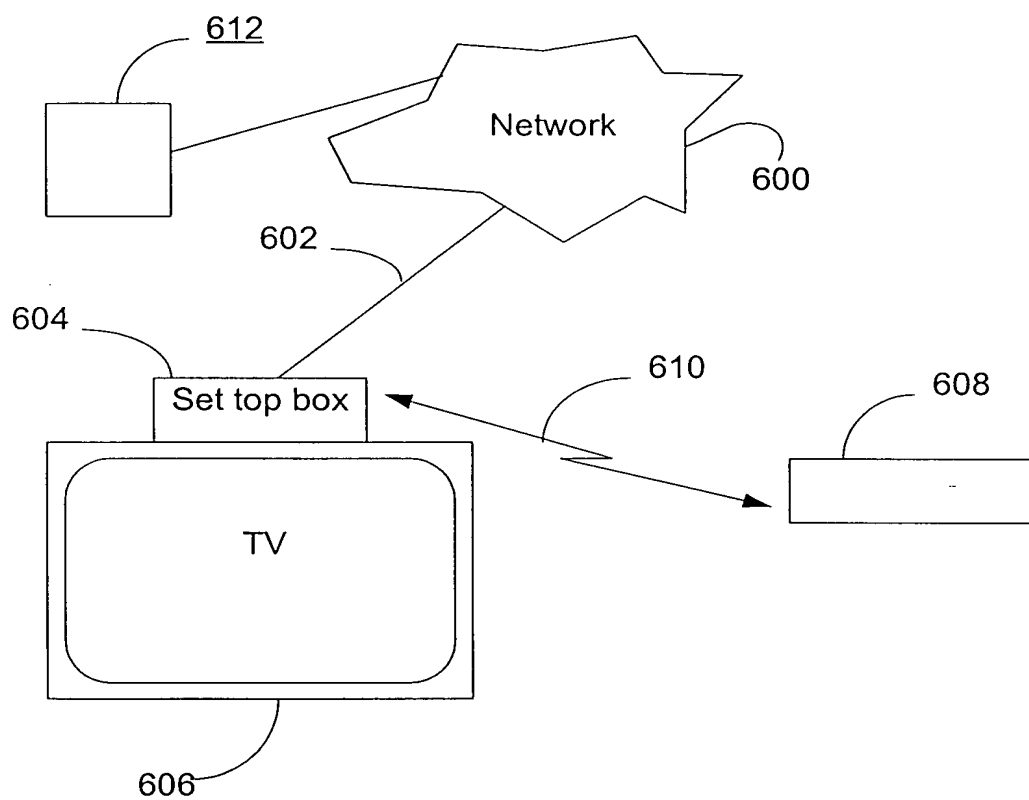


Fig. 6

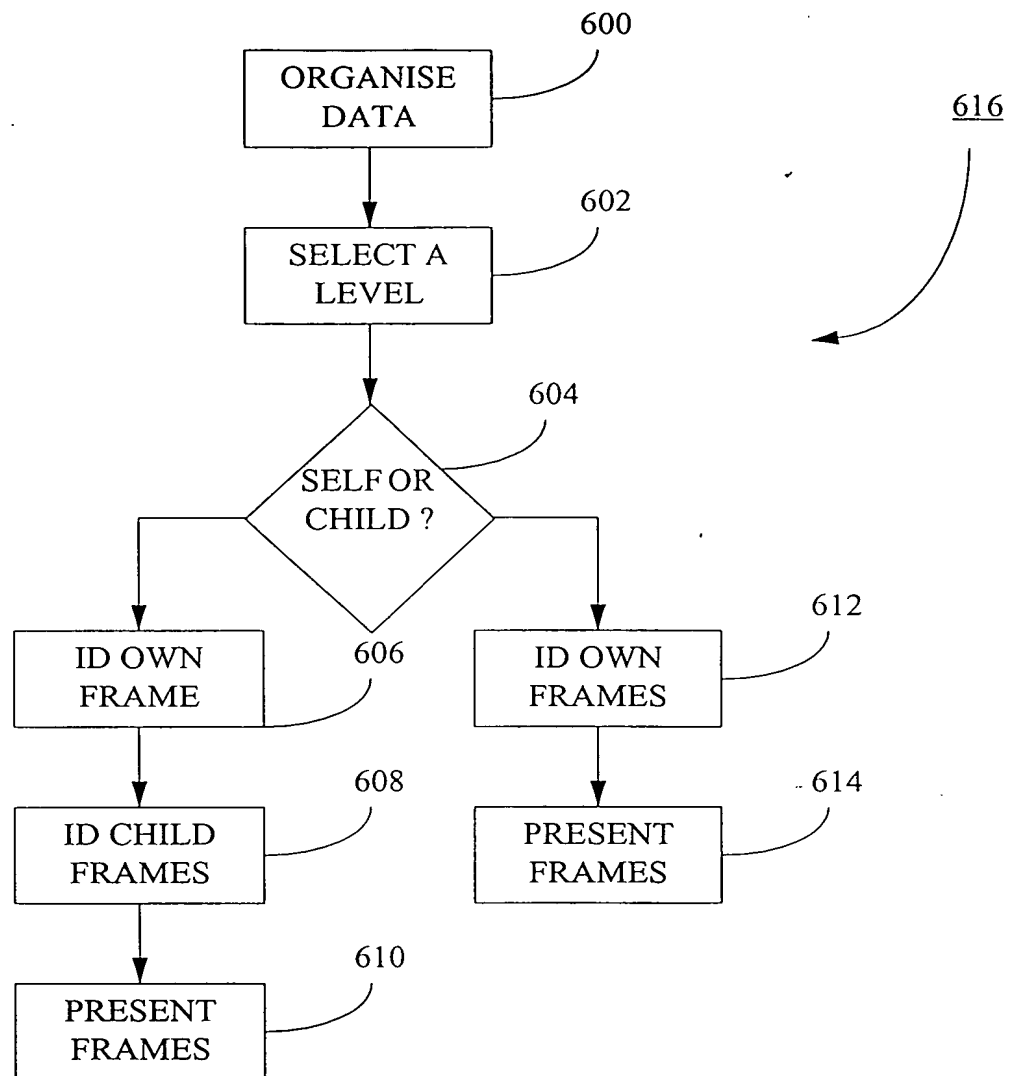


Fig. 7